

Coating Services for Cutting Tools

Your guide to higher machining productivity and cost efficiency



The Oerlikon Balzers production process ensures high, reproducible quality all the time – worldwide

Oerlikon Balzers stands for new development and refinement of groundbreaking coating solutions tailored to current market needs and individual customer requirements. In over 110 coating centres worldwide, cutting tools are run through automated and standardised production sequences to achieve the best in reproducible quality. All Balzers coating centres throughout the world are certified according to ISO and QS standards.

Packaging/delivery

Coated parts are usually returned in the packaging in which they were delivered. Considerable savings are possible if the parts are delivered in suitable cleaning baskets.

Post-treatment

Numerous methods are available to give cutting tools the finishing touches. Over many years, Oerlikon Balzers has gained the indispensable experience and expertise to provide you with the best possible solution and equipment for your needs.

Coating

Coatings of Oerlikon Balzers provide you with high-performance cutting tools that are ready to meet the increasing demands of modern manufacturing. A broad range of coating technologies is available for almost unlimited applications. Working in close collaboration with our customers throughout the world, our specialists are continuously opening up new applications. Customised coatings are available on request.






Our coating solutions - tailor-made for your markets











Reliable machining of large components for the power generation industry

Oerlikon Balzers coatings make a valuable contribution to the reliable machining of large components such as windmill and turbine blades, and to the sustainability of their manufacturing process.





Extreme and demanding environmental conditions in the oil & gas industry

Coating solutions from Oerlikon Balzers meet expectations to the fullest extent for the machining of components for the oil and gas industry.



High precision machining in medical applications

Oerlikon Balzers hard coatings are perfectly designed to machine difficult-to-cut materials in medical applications.







High productivity, manufacturing reliability, cost efficiency – the demands made on cutting tools are enormous. You can rely on the innovative BALINIT® wear-resistant coatings from Oerlikon Balzers, a world-wide technological leader in the field of hard coatings.

With BALINIT® you can expect a wide variety of coating properties such as extreme coating hardness and high wear resistance – and benefit from numerous advantages for milling, drilling, reaming, turning, threading and gear cutting.



Lower your production costs with BALINIT

Wear-protection coatings from Oerlikon Balzers offer you enormous savings potentials. The machining time has the greatest influence on cost efficiency and productivity: A 20% increase in the cutting parameters reduces production costs by up to 15%.

The outstanding properties of Oerlikon Balzers coating solutions provide longer tool service lives at higher cutting speeds at the same time.



A technological milestone has been achieved: BALIQ® by Oerlikon Balzers. It is based on our S3p® technology (Scalable Pulsed Power Plasma) that intelligently combines the advantages of Arc Evaporation and Sputtering. The result is BALIQ®, a new family of wear-resistant coatings with revolutionary properties for a unique spectrum of applications. You benefit from new possibilities that transcend anything seen before – with coatings tailored precisely to your needs.



High density

The density of BALIQ® coatings is very close to the greatest density theoretically possible. High toughness and high resistance to crack propagation and diffusion are salient features.







Excellent friction

Among other benefits, the excellent coefficient of friction of BALIQ® results in improved chip flow and reduced built-up edge formation.



Revolutionary smoothness

BALIQ® enables smooth chip removal and eliminates the need for mechanical post-treatment. Adhesion and built-up edges are avoided even with difficult-to-machine materials.





Exceptional precision

High precision in coating thickness distribution guarantees extremely sharp edges. Outstanding results are achieved especially with tools that have ultra-small diameters.



BALIQ®



Very good adhesion


BALIQ® coatings feature an exceptionally strong coating/ substrate bond. High adhesion guarantees long and reproducible tool service lives.

BALIQ UNIQUE -

Differentiation, Classification and Visualisation with coloured high performance coatings

With BALIQ® UNIQUE, colour has come into play literally for the first time. That means, you can benefit from the outstanding wear protection properties of BALIQ® coatings, as well as giving your tools a look that is absolutely unique.










BALINIT coatings Coating properties at a glance

BALINIT®	Coating material	Coating hardness H _{IT} (GPa)	Compressive stress (GPa)	Max. service temperature (°C)	Coating temperature (°C)	Coating colour
A	TiN	30 +/-3	-2 +/-1	600	< 500	golden yellow
В	TiCN	37 +/-3	-3 +/-1	400	< 500	blue grey
ALCRONA PRO	AlCrN-based	36 +/-3	-3 +/-1	1,100	< 500	bright grey
ALTENSA	AlCrN-based	40 +/-3	-2 +/-1	1,100	< 500	light grey
ALNOVA	AlCrN-based	38 +/-3	-3 +/-1	1,100	< 500	light grey
LATUMA	AlTiN-based	35 +/-3	-3 +/-1	1,000	< 500	grey
PERTURA	AlTiN-based	35 +/- 3	-4 +/-1	1,000	< 600	aubergine grey
TISAFLEX	AlTiN/TiSiXN	38 +/-5	-5 +/-1	1,100	< 600	bronze
DIAMOND MICRO	C (sp3) micro- crystalline	80 – 100	-	600	< 900	grey
DIAMOND NANO	C (sp3) nano- crystalline	80 – 100	-	600	< 900	grey
HARD CARBON	ta-C	50 – 60	-	500	< 150	black rainbow





BALIQ coatings Coating properties at a glance

BALIQ®	Coating material	Coating hardness H_{IT} (GPa)	Compressive stress (GPa)	Max. service temperature (°C)	Coating temperature (°C)	Coating colour
ALCRONOS	AlCrN-based	37 +/-3	-3.5 +/-1	1,100	< 500	bright grey
AUROS	AlCrTiN- based	30 +/- 3	-2.5 +/-1	600	< 500	rose gold
ALTINOS	AlTiN-based	36 +/-3	-3.3 +/-1	1,000	< 500	anthracite
TISINOS	AlTiSiN- based	38 +/-5	-3.1 +/-1	1,000	< 500	bronze
MICRO ALCRONOS	AlCrN-based	37 +/-3	-3.5 +/-1	1,100	< 500	bright grey
MICRO ALTINOS	AlTiN-based	36 +/-3	-3.3 +/-1	1,000	< 500	anthracite
MICRO TISINOS	AITiSiN- based	38 +/-5	-3.1 +/-1	1,000	< 500	bronze



Coating recommendations for Gear Cutting, Milling

	GEAR CUTTING		
Material	Hobs (HSS/carbide)	Stick blades	Shaper cutters
Unalloyed steel	AT / AP	AT / AP	AT / AP
Steel < 1000 N/mm ²	AT / AP	AT / AP	AT / AP
Steel > 1000 N/mm ²	AT / AP	AT / AP	AT / AP
Steel 45 - 56 HRC	AT / AP	AT / AP	AT / AP
Steel 56 - 72 HRC	AT / AP / LM	AT / AP / LM	AT / AP / LM
Stainless steel			
Cast iron (GG, GGG)	AT / AP	AT / AP	AT / AP
Wrought Al / Cast Al (6 - 12% Si)			
Al alloys > 12% Si			
Nickel alloys			
Titanium, titanium alloys			
Brass, copper, bronze			
Graphite			
Composites (CFRP/GFRP)			
Organic material (e.g. wood)			





g, Drilling and Reaming

	MILLING	DRILLING / REAMIN	G	
Skiving tools	End mills (carbide)	Drills (carbide)	Drills (HSS)	Reamers
AT / AP	AP	PT / AP / LM	AP / LM	ALC / PT / AP
AT / AP	AP	PT / LM / AP	AP / LM	ALC / PT / AP
AT / AP	AP / LM	PT / LM / AP	AP / LM	ALC / PT / AP
AT / AP	TF / AN / LM	PT / LM / AP	LM / AP	ALC / PT / LM
AT / AP / LM	TIS / TF / LM	PT / TF / LM		TIS / PT
	TF / AN / LM	PT / LM / AP	AP / LM	ALC / PT / AP
AT / AP	AN / LM / AP	PT / LM / AP	AP / LM	ALC / PT / AP
	HC	HC	HC	HC
	DIA N / HC	DIA N / HC	HC	HC / DIA N
	TF / TIS / LM	PT / LM		TIS / LM
	TIS / TF / AN	PT / LM / AP		TIS / LM
	HC	HC	HC	HC
	DIA M / HC	DIA M		
	DIA N / HC	DIA N / HC		
	НС	НС	HC	

A = BALINIT® A
AP = BALINIT® ALCRONA PRO
AN = BALINIT® ALNOVA
AT = BALINIT® ALTENSA
B = BALINIT® DIAMOND MICRO
DIA M = BALINIT® DIAMOND NANO
HC = BALINIT® HARD CARBON
LM = BALINIT® LATUMA
PT = BALINIT® PERTURA
TF = BALINIT® TISAFLEX

ALC = BALIQ® ALCRONOS
ALT = BALIQ® ALTINOS
AUR = BALIQ® AUROS
MALC = BALIQ® MICRO ALCRONOS
MALT = BALIQ® MICRO ALTINOS
MTIS = BALIQ® MICRO TISINOS
TIS = BALIQ® TISINOS







Coating recommendations for Inserts, Micromachining, Threading

INSERTS		MICROMACHINING		THREADING
Turning	Milling	End mills	Drills	Taps
LM / ALT	LM / AP	MALC / MTIS	MALC / MTIS	AUR / ALC / B
LM / ALT	LM / AP	MALC / MTIS	MALC / MTIS	AUR / ALC / B
LM / ALT	LM / AN	MALC / MTIS	MALC / MTIS	AUR / ALC / B
LM / ALT	LM / AN	MTIS / MALC	MTIS / MALC	AUR / ALC / B
ALT / LM	ALT / LM	MTIS / MALC	MTIS / MALC	
LM / ALT	LM / AN / ALT	MTIS / MALC	MTIS / MALC	AUR / ALC / B
LM / ALT	LM	MALC / MTIS	MALC / MTIS	AUR / ALC / B
НС	НС	НС	HC	HC / B
DIA N / HC	DIA N / HC	DIA N / HC	HC / DIA N	HC / DIA N
LM	LM / AN	MTIS / MALT	MTIS / MALT	AUR / ALC / B
LM	TIS / AN / LM	MTIS / MALC	MTIS / MALC	AUR / ALC / B
HC	НС	НС	HC	HC
DIA M	DIA M / HC	DIA M / HC	DIA M / HC	
DIA N	DIA N / HC	DIA N / HC	DIA N / HC	
HC	НС			





g and Broaching

### Thread formers	
AUR / ALC / A AUR / ALC / A ALC / AP AP AUR / ALC / AP AP	de broaches
AUR / ALC / A ALC / AP AP	
AUR / ALC / A ALC / AP AP	
AUR / ALC / A ALC / LM AP	
TIS / TF / LM AP / LM	
AUR / ALC / A ALC / LM AP	
AUR / ALC / A ALC / AP AP	
HC/A HC/B HC/AP	
HC / DIA N HC / DIA N HC / AP	
AUR / ALC / A TIS / LM AP	
AUR / ALC / A TIS / LM AP	
HC HC/B HC/AP	





Reconditioning by Oerlikon Balzers – the fast all-inclusive solution for your round tools


Cutting tools can be reground and recoated in selected coating centres. Even after three reconditioning cycles, you save more than 50% as compared to the purchase of a new coated tool while simultaneously benefitting from the same high performance.



primeGear – a customised service to realise unmatched gear cutting tool performance

primeGear offers you a higher process reliability, less tool wear, longer tool life and reduced cycle time. The result: production cost reduction of up to 40%. Together with you we identify and eliminate the weak links in the tool life cycle:


- Surface treatment
- Cutting process
- Tool handling
- Resharpening

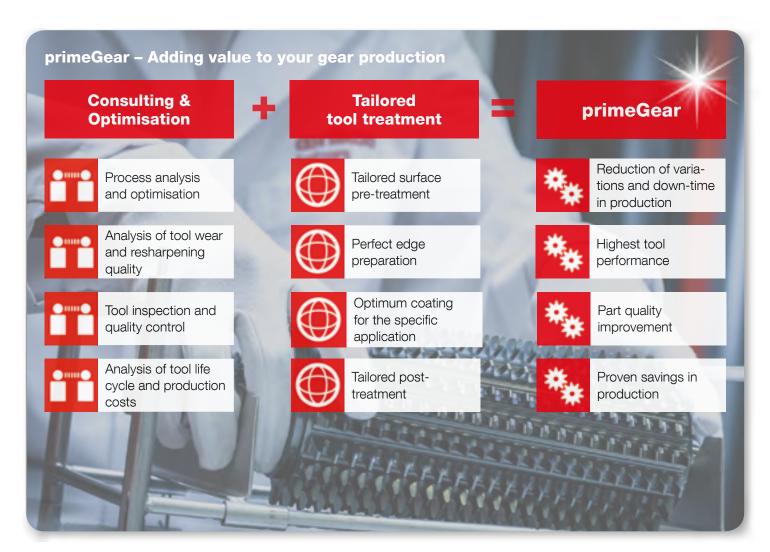


inShape - gentle de-coating of cemented carbide tools

With inShape Balzers offers an innovative process for the reconditioning of carbide tools without damaging the tool surface or losing the profile.

- Complex tools like hobs, broaches or skiving tools keep their profile shape
- Allows reconditioning of BALINIT® ALTENSA, LATUMA and PERTURA coated tools
- Reduces tool costs over a tool life cycle by up to 25%
- Smooth de-coating of cemented carbide tools without damaging the surface
- No profile grinding required over the whole tool life cycle to retain tolerances

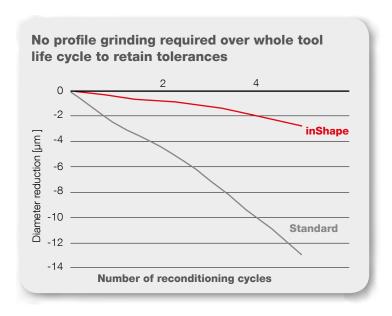

Close to our customers - worldwide

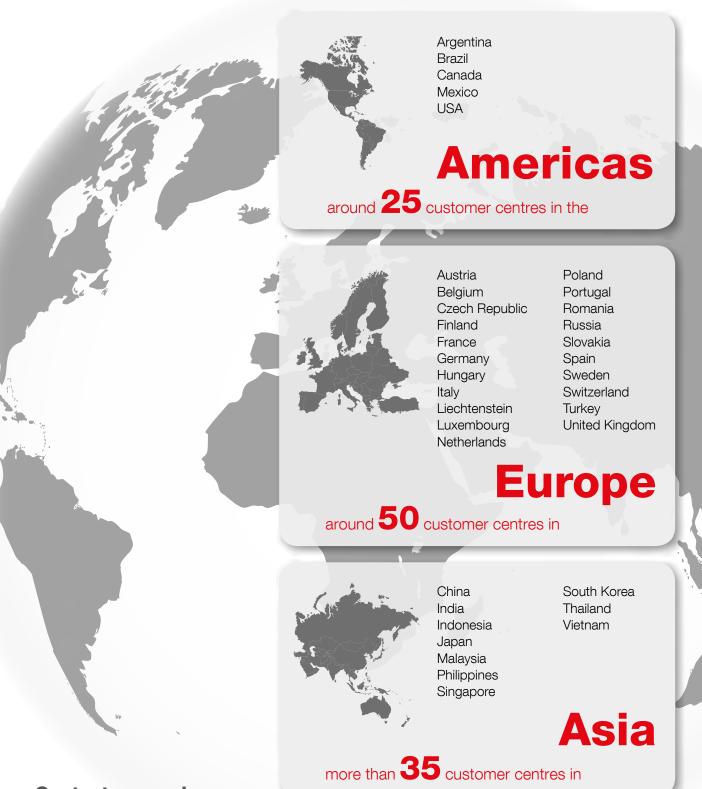

Contact us now!

Balzers Headquarters

Oerlikon Balzers Coating AG Balzers Technology and Service Centre Iramali 18 LI-9496 Balzers Liechtenstein T +423 388 7500

œrlikon balzers